



## EB3FX/HC/PB - Lincat FilterFlow FX Counter-top Combined Water Boiler & Chiller with Push Button Dispense - W 250 mm - 3.0 kW

The FilterFlow Combined Water Boiler and Chiller exists because we don't believe you should have to use two different appliances in July and January - it provides hot and cold water on tap, 24/7.

- ✔ Convenient push button operation, ideal for front of house and self service
- ✔ Filtered chilled and hot water on tap 24 hours a day, space saving and economic - no need for a separate boiler and chiller
- ✔ Narrow 250mm footprint saves valuable counter space without compromising capacity or performance
- ✔ Built-in water filtration system improves water quality and reduces scale build-up. High volume, easy change FilterFlow cartridge
- ✔ Easily operated from a large, colour touchscreen display. Menu navigation is quick and easy with the temperature and timer simple to adjust
- ✔ Enhanced diagnostics identify possible causes. The on screen diagnostic information will enable the engineer to identify the parts needed and repair your water boiler at first visit

### Specifications

Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>Total Power kW</b>	3.0
<b>Range</b>	FilterFlow	<b>Temperature Range °C</b>	<11 [Cold]; 70-98 [Hot]
<b>Series</b>	FX Counter-top Boiler	<b>IP Rating</b>	IP23
<b>Power Type</b>	Electric	<b>Hourly Output Litres</b>	12 [Cold]; 28 [Hot]
<b>Unit Type</b>	Counter-top	<b>Hourly Output Cups</b>	60 [Cold]; 140 [Hot]
<b>Available in UK Only</b>	No	<b>Temperature Control</b>	Electronic
<b>UK Warranty</b>	2 Years Parts and Labour Warranty		
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105118237		

Key Specifications		Capacity	
<b>Refrigerant Type</b>	R290	<b>Hot and Cold Water Output</b>	Yes
<b>Outlet</b>	Push Button [Twin Spout]	<b>Rapid Draw Off Litres</b>	5.0 [Hot]
<b>Dispense Lock</b>	No	<b>Rapid Draw Off Cups</b>	25
		<b>Capacity Litres</b>	7.0

Weights and Dimensions		Supply Connections	
<b>Unit Height (External) mm</b>	595	<b>Requires Installation</b>	No
<b>Unit Width (External) mm</b>	250	<b>Requires Electrical Supply</b>	Yes
<b>Unit Depth (External) mm</b>	570	<b>UK 3 Pin Plug</b>	Yes
<b>Net Weight Kg</b>	24.8	<b>Requires Hardwiring</b>	No
		<b>Electrical Supply Rating Watts</b>	3,000
		<b>Single Phase Amps</b>	13
		<b>Single Phase Voltage</b>	230
		<b>Water Connection Pressure Bar</b>	2.0-7.0
		<b>Water Connection</b>	3/4"


Shipping

Packed Weight Kg	27.28
Packed Height cm	88
Packed Width cm	65
Packed Depth cm	38

Available Accessories

DP10	Descaler Powder
FC04	Filter Cartridge for Lincat FilterFlow Water Boiler
PI36	INLET CONNECTION HOSE EB

Technical Picture

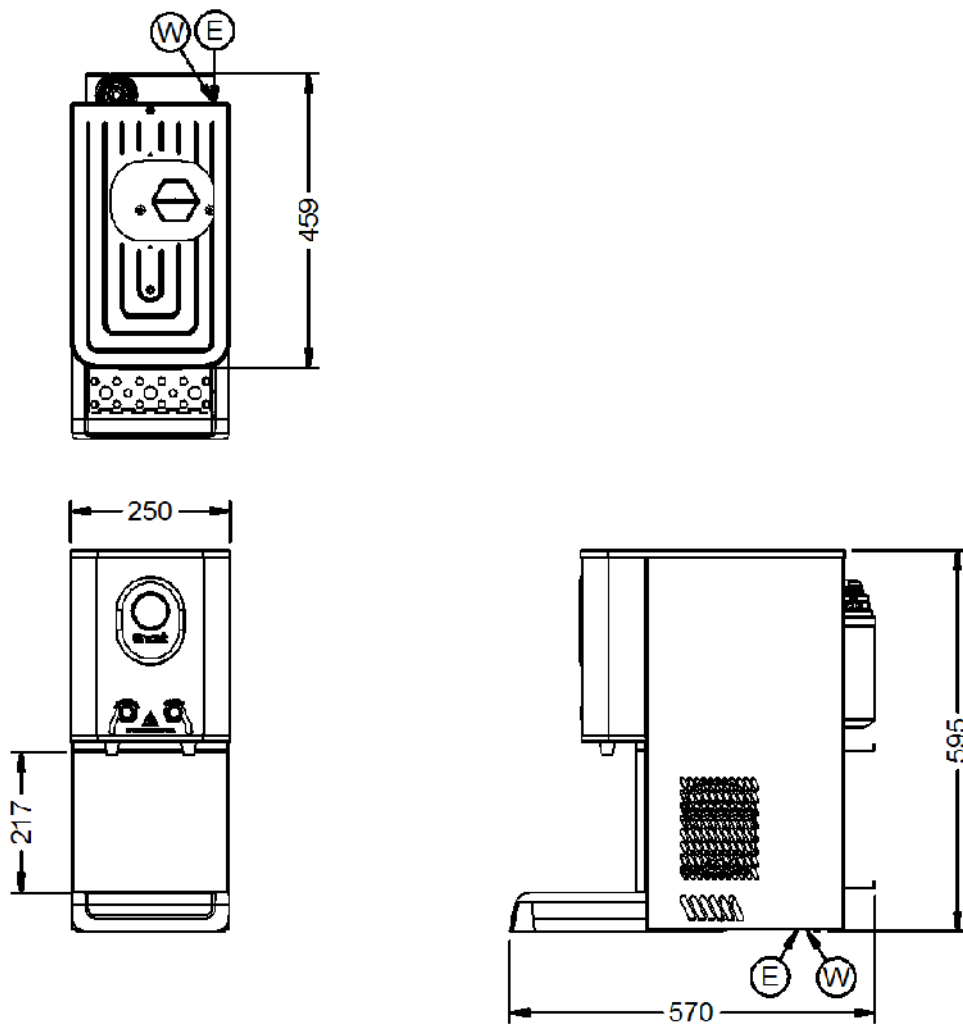



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm