SILVERLINK 600



J5/P - Lincat Silverlink 600 Propane Gas Freestanding Single Tank Fryer - 1 Basket - W 300 mm - 12.0 kW

Deliver perfectly crisp on the outside and fluffy on the inside chips time after time with the Silverlink 600 Free Standing Gas Fryer.

- Single tank fryer delivering 22.5kg of chips an hour, perfect for pubs, restaurants and care homes
- Front mounted controls for safety
- Thermostatically controlled to give accurate cooking temperatures throughout cooking. Flame failure device and top temperature cut out ensures safe operation.
- Cool zone collects cooking debris gives cleaner cooking results and saves money by prolonging the life of the oil

- Piezo ignition for easy lighting
- Heavy duty nickel plated baskets for the most demanding of operations
- Internal drain off tap for easy removal of cooking

| 5 | pe | CITI | ca | tic | ons |
|---|----|------|----|-----|-----|
| | | | | | |

| Specifications | | | |
|---------------------------|-----------------------------------|---|--|
| Summary | | Power and Performance | |
| Brand | Lincat | BTU per Hour | 38,555 |
| Range | Silverlink 600 | Total Power kW | 11.3 |
| Power Type | Gas | Temperature Range °C | 110-190 |
| Gas Type | Propane Gas | Temperature Control | Mechanical |
| Unit Type | Free-standing | | |
| Available in UK Only | No | | |
| UK Warranty | 2 Years Parts and Labour Warranty | | |
| Export Warranty | Contact your local dealer | | |
| GTIN | 5056105105138 | | |
| Key Specifications | | Capacity | |
| Number of Baskets | 1 | Product Output per Hour | 18kg chips -12mm[frozen], 22.5kg chips - |
| Number of Tanks | 1 | r roduct Gutput per riodi | 12mm [ch |
| Gravity Filtration | No | Capacity Litres | 12.0 |
| Pumped Filtration | No | | |
| Drain Location | Internal | | |
| Weights and Dimensions | | Supply Connections | |
| Unit Height (External) mm | 1060 | Requires Installation | Yes |
| Unit Width (External) mm | 300 | Requires Electrical Supply | No |
| Unit Depth (External) mm | 690 | Gas Connection BSP | 1/2" |
| Net Weight Kg | 43 | Gas Consumption at full rate Propane m³ per Hour | 0.81 |
| | | Gas Pressure Propane mbar | 25.0 |

Total heat input at full rate Propane kW Total heat input at full rate Propane

BTU per hour

36,800



SILVERLINK 600

Shipping


Packed Weight Kg47.3Packed Height cm122Packed Width cm85Packed Depth cm45


Available Accessories


CH01 Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU

CH02 Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU

Technical Picture





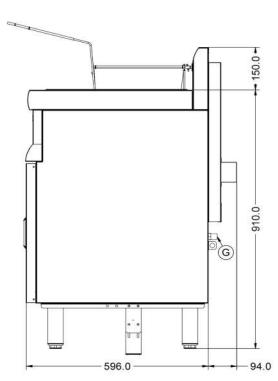







Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

_

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm



Product Code: J5/P Page Number: 3 Print Date: 03/03/2023