Packed Depth cm

## **SILVERLINK 600**



J6 - Lincat Silverlink 600 Electric Free-standing Single Tank Fryer - 1 Basket - W 300 mm - 6.0 kW Deliver perfectly crisp on the outside and fluffy on the inside chips time after time with the Silverlink 600 Free Standing Electric Fryer.

- Single tank fryer delivering 26kg of chips an hour, perfect for pubs, restaurants and care homes
- Front mounted controls for safety
- Hinged elements to give easy access during cleaning
- Cool zone collects cooking debris gives cleaner cooking results and saves money by prolonging the life of the oil
- Thermostatically controlled to give accurate cooking temperatures throughout cooking. Flame failure device and top temperature cut out ensures safe operation.
- Fully moulded 304 stainless steel tank and heavy duty nickel plated baskets for the most demanding of operations
- Front drain off tap for easy removal of cooking oil

Range Silverlink 600 Temperature Range *C 130-190 Power Type Electric IP Rating 1934  Unit Type Free-standing Temperature Control Mechanical Pating P	Summary		Power and Performance	
Number of Baskets Number of Tanks 1 Capacity Filtration No Pumped Filtration No Drain Location  No Supply Connections  Unit Height (External) mm Voit Weight (External) mm Soo Unit Depth (External) mm Soo No No No Requires Electrical Supply No No No No No No No Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage Single Phase Voltage  18kg chips -12mm[frozen], 26kg ct 12mm[frozen], 26kg ct 12mm[frozen	Brand Range Power Type Unit Type Available in UK Only UK Warranty Export Warranty GTIN	Silverlink 600 Electric Free-standing No 2 Years Parts and Labour Warranty Contact your local dealer	Temperature Range °C IP Rating	130-190 IP34
Number of Tanks  Gravity Filtration  No  Pumped Filtration  Drain Location  Weights and Dimensions  Unit Height (External) mm  Unit Width (External) mm  Say  Say  Say  Say  Say  Say  Say  S	Key Specifications		Capacity	
Unit Height (External) mm 980 Requires Installation Yes Unit Width (External) mm 300 Requires Electrical Supply Yes Unit Depth (External) mm 632 UK 3 Pin Plug No Net Weight Kg Pequires Hardwiring Electrical Supply Rating Watts 6,000 Single Phase Amps 26.1 Single Phase Voltage 230	Number of Baskets Number of Tanks Gravity Filtration Pumped Filtration Drain Location	1 No No		-
Unit Width (External) mm  300  Requires Electrical Supply  Ves  UK 3 Pin Plug  No  Net Weight Kg  25.9  Requires Hardwiring Electrical Supply Rating Watts 6,000 Single Phase Amps 26.1 Single Phase Voltage 230	Weights and Dimensions		Supply Connections	
Three Phase Amps Li=15.U; L2=15.U; L5=N/A  Three Phase Voltage 400	Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Net Weight Kg	300 632	Requires Electrical Supply UK 3 Pin Plug Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage Three Phase Amps	Yes No Yes 6,000 26.1 230 L1=13.0; L2=13.0; L3=N/A
	Packed Weight Kg Packed Height cm Packed Width cm	28.49 53 114		




## **Available Accessories**


BA96 BASKET SPUN DFSMALL

ST10 NULL
TA28 NULL

## **Technical Picture**





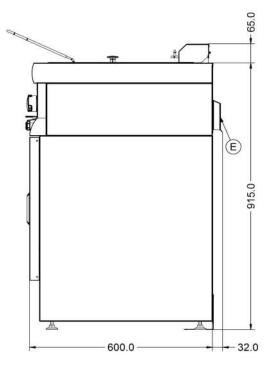







**Lincat Limited** 

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

A member company of

**Customer Care** 

**Tel:** +44 1522 875500

Email: care@lincat.co.uk

**Export Customers** 

**Tel:** +44 1522 875536

Email: export@lincat.co.uk

**Opening Hours** 

Monday - Friday:

8.30am - 5pm

