



Counter Fridge

Instruction manual



BY	Counter fridge	2
	<u>Instruction manual</u>	
NL	Refrigeration Bench	7
	<u>User Manual</u>	
FR	Countertop refrigerator	12
	<u>Mode of Employment</u>	

OF	Thekenkühlsstrank	17
	<u>Operation Management</u>	
IT	Countertop refrigerator	22
	<u>Instruction manual</u>	
IS	Countertop fridge	27
	<u>Instruction Manual</u>	

Template • Templates • Template • Template • Template:
UA100 / UA101 / UA102 / UA108 / UA109

Cooling tips:

- Condensation and ice form in case of frequent and prolonged opening of doors.
- Using the appliance outside the recommended temperature range and placing it near a heat source also increase the amount of ice and internal/external condensation. In case of external condensation, wipe the surface with a cloth.
- Excess ice leads to longer operating times, which increases energy consumption and component wear.
- If the seal is damaged or deformed, the energy consumption will increase. Replace the seal to restore the efficiency of the appliance.
- Avoid obstructing fans and do not exceed maximum load lines, as this would affect air distribution and increase energy consumption.

Troubleshooting

A qualified technician should perform repairs if necessary.

Dysfunction	Probable cause	Intervention
The device does not work	The freezer is not turned on	Check that the device is properly plugged in and turned on
	The plug or cable is damaged	Replace the plug or cable
	Dysfunction of the food sector	Check the power supply
The device turns on, but the temperature is too high/low	Too much ice on the evaporator	Defrost the device
	Dust Clogged Condenser	Condenser Cleaner
	The doors do not close properly	Check that the doors are closed and that the seals are not damaged
	The appliance is placed near a heat source or the airflow to the condenser is interrupted	Move the refrigerator to a more suitable location
	The ambient temperature is too high	Increase the ventilation or move the appliance to a cooler location
	Inappropriate food is stored in the appliance	Remove overheated food or fan obstructions
	The device is overloaded	Reduce the amount of food stored in the appliance
The device has a water leak	The device is not properly upgraded	Adjust the screw feet to level the device (the failed case)
	The discharge outlet is obstructed	Clear the drain outlet
	The flow of water to the drain is obstructed	Clear the floor of the appliance (failed case)
	The drain tank overflows	Empty the drain tank (failed case)
The device is abnormally noisy	Loose nut/screw	Check and tighten all nuts and screws
	The device was not installed in a horizontal or stable position	Check the installation position and modify if necessary

Electrical connection

The plug must be plugged into the appropriate dry outlet.

POLAR devices are wired as follows:

- Conductive wire (brown) to the terminal marked L
- Neutral wire (blue) to terminal marked N
- Ground wire (green/yellow) to terminal marked E

This appliance must be grounded.



If in doubt, consult a qualified electrician.

Electrical isolation points shall be free from any obstruction. In the event of unplugging required in an emergency, they should be easily accessible.

Mise or grab

EU regulations require that products containing refrigerants be disposed of by specialist companies, equipped to extract and recycle gases, metal and plastic components.

Contact your waste collection authority for disposal of your appliance. Although nothing requires local authorities to take responsibility for the disposal of commercial refrigeration equipment, they may be able to advise you on locally available means of disposal.

You can also call the POLAR assistance standard, which will tell you about national hosting companies within the EU.

Compliance

The DEEE logo on this product or its documentation indicates that it should not be rejected with household waste. To avoid posing a risk to human health and/or the environment, entrust the disposal of this product to an environmentally friendly approved recycling site. For further details on the proper disposal of this product, contact the product supplier or the waste management authority in your area.



POLAR parts have been subjected to rigorous testing in order to be declared compliant with regulatory standards and specifications defined by international, independent and federal authorities.

POLAR products have been declared fit to carry the following symbol:



All rights reserved. The production or transmission, in whole or in part, in any form or by any what means, both electronic and mechanical, in the form of photocopying, recording or other such mode of employment are prohibited without the prior authorization granted by POLAR.

We endeavor, by all means at our disposal, to ensure that the details contained in this employment mode are correct at the date of printing. However, POLAR reserves the right to change the specifications of its products without notice.

Safety Tips

Please take some eyes time and read through this manual carefully. Only with correct maintenance and prescribed operation can your POLAR product achieve optimal performance.

- Place on a flat, stable Surface.
- All required assembly and repair work should be carried out by maintenance personnel or a qualified technician. Do not remove any parts or work surfaces from this product.
- Local and national standards are reviewed for following standards and regulations:
 - Occupational Safety Regulations
 - BS AND Behavioral Practices
 - Fire Protection Training
 - IEE Connection Instructions
 - Building Regulations
- Do NOT clean the device with a jet or high pressure cleaner.
- DO NOT operate the device outdoors.
- DO NOT use the device for medication storage.
- DO NOT stand or lean on the floor, drawers or doors.
- Please note that oil and grease do not come into contact with the artificial components or the coating. If it occurs again, clean the affected area surrounding.
- Place bottles with high alcohol content sealed and sink in the refrigerator.
- Always carry, store and handle the appliance in an upright position and secure it to the socket.
- Always turn off and disconnect the device from the power supply before cleaning.
- Keep all packaging parts away from children. Dispose of packaging in accordance with local regulations.
- For safety reasons, a damaged power cord must be replaced by a POLAR employee or recommended qualified electrician.

- This device should only be used by persons (especially children) with reduced physical, sensory or mental abilities, lack of experience or knowledge, if they were asked to do so by a person responsible for their safety. be constantly monitored.
- POLAR recommends that this equipment be serviced regularly (at least annually) by a professional. The testing shall include the following: Visual Inspection, Polarity Test, Earth Permeability, Insulation Permeability and Functional Testing.

Caution: Fire hazard

- Do not store explosives such as syringes containing flammable solvents in this appliance.



Warning: Keep all lift openings free. The device should not be installed without proper ventilation.

- **Color:** Do not use any mechanical devices or other means to restrict the removal process other than those recommended by the manufacturer.
- **Color:** Do not damage the refrigerant circuit.
- **Color:** Do not use an electrical device within the bracket of the device, do not suffer the type.

Scope of Supply

The following is contained in the delivery scope:

- POLAR-Kühlgerät
- Spacer (x 2)
- Operations Management

POLAR prides itself on the high quality of its products and its first-class service. We ensure that all delivered products are fully functional and in a wall-free condition at the time of packaging.

Should you determine shipping damage, please contact your POLAR dealer immediately.

Assembly

Hint: Not for use in cars or trailers, passenger cars or similar vehicles.

Hint: If the device is not being transported or stored, it must be set up around 12 hours before operation. If in doubt, leave it alone.

1. Take the device out of the packaging. Ensure that all protective films and coatings are thoroughly removed from all surfaces.
2. To optimize performance and durability, ensure that a minimum distance of 2.5 cm is maintained between the device and the walls and other objects, where above a

Minimum height of 20 cm is. **DO NOT PUT NEAR A HEAT SOURCE.**


The package includes 2 spacers for mounting on the back, which ensure a good assurance that the device will not be pushed unnoticeably close to the wall.

3. Attach the brakes to the rollers so that the vehicle cannot move.

Hint: Before the first use of the device, clean the ablage and the inside with soapy water and dry it accordingly.

Meaning

Bedienfeld

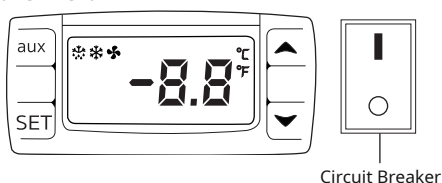

Onesc hold

1. Sch leave the door(s) old chubladen des Geräts.
2. Sch you the on/off each SCdumbbell a [I]. That act temperature in the G erfrood is indicated.

First llen der Betrie bstemperature

1. Hal then See the TasteSEVEN(ASED) 3 Secustomers long printed .
2. Drew cken See the Keys or believe AngelOWN the desired n Temperature.
3. Press the KeySEVEN(Set), to save the Temp ratur. and

Manuelle Abtauerung


Keep the Absolute „aux“ (Additional) Press for 2 seconds to start the manual removal. The removal lamp lights up. The removal cycle is automatically terminated.

Cleaning, Care and Wartung

- **Turn off the device and disconnect the power supply before proceeding with cleaning.**
- **Dispose of the device at least every 3 months, including after use.**
- Clean the inside of the device as thoroughly as possible.
- Do not use abrasive cleaners. These can leave harmful residues.
- Clean the tube seal with warm soapy water.
- Always wipe the appliance dry after cleaning.
- Make sure that the water used during cleaning does not flow through the ablation opening in the dilution tub.
- Be careful when cleaning the back of the device. Sharp edges can lead to cut injuries.

Capacitor Cleaning

- The condenser is a part of the cooling system. A quarterly cleaning is recommended.
- Always disconnect the power supply before carrying out routine maintenance work.
- Failure to clean the capacitor leads to increased energy consumption, reduced performance and service life
- Ihres Polar-Gerätes and possibly to ANB chen Ihrer G istfwhole.
- Dice Modelle hab and removable filter, the dhe with a Sta sction will be cleaned ornn.

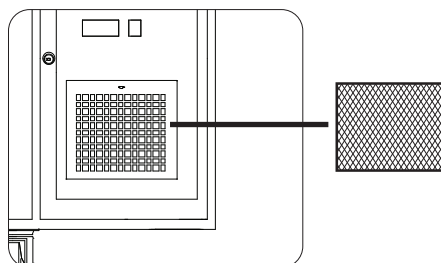

Cooking Tips:

- Condensation and ice may form during wide and prolonged opening of the door.
- Due to operation outside the recommended temperature range and installation near a heat source also increases the amount of ice and internal/external condensation. If external condensation occurs, wipe off surfaces with a cloth.
- Excessive icing leads to longer operating times, which increases energy consumption and leads to accelerated component wear.
- When the seal is damaged or deformed, energy consumption increases. Replace the gasket to restore efficiency.
- Do not block vents and do not exceed maximum load limits. Otherwise, the air distribution will be affected and the energy consumption will increase.

Disturbance Search

If required, a qualified technician must carry out repairs.

Disruption	Suspected Cause	Solution
The device works not	The device is not connected	Check if the power plug is plugged into the socket and the device is switched on
	Plug and cable are damaged	Replace the plug and/or cable
	Faulty Mains Supply	Check the mains supply
The Device should but the temperature is too high/too low	Too much Ice on the evaporator	Unplug the device
	The capacitor is blocked by dust	Clean the Dishwasher
	The doors are not locked properly	Check that the doors are locked and the seals are not damaged
	The appliance is near a heat source or the airflow to the refrigerant is interrupted	Place the refrigerator in a convenient location
	The ambient temperature is too high	Improve the sound or put the device in a cooler place
	Unsuitable foods are stored in the device	Remove excessive hot food or air clogs
	The device is overloaded	Reduce the amount of nutrients stored in the vessel
Water leaks from the device	The device is not properly leveled	Put the screw feet in to level the device (in case of falls)
	The exhaust is blocked	Clean the outlet
	Water flow to the drain is obstructed	Clean the bottom of the device (in case of spills)
	The Drop Scale is overflowing	Unpack the Drop Shell (falls encountered)
The Tool is unusually loud	Loosen Nut/Screw	Check all nuts and bolts and tighten them.
	The device was not set up straight or stable	Alignment tests and ggf. change

Electronic Connectors

The plug must be plugged into a suitable plug socket.

Betrayal of POLAR Devices:

- Circuit Breaker Leiter (brown) and Terminal L
- Neutral (blue) and Terminal N
- Erdleiter (green/yellow) and Terminal E

This device must be ready.



Please consult a qualified electrician with any questions.

Electroisolation points must not be blocked. During an emergency, these points must be immediately accessible at all times.

Divorce

Measured EU regulations must provide coal products from manufacturing companies that dispose of or recycle all gas, metal and copper containers.

Your local authority can inform you about the care of your vehicle. Municipal authorities are not obliged to dispose of portable firearms. They can also inform you about local contractors who provide this equipment.

Or call the POLAR helpline. We are looking for a list of national caregivers in the EU countries.

Compliance

The WEEE logo on this product or in the documentation indicates that the product does not need to be disposed of with ordinary household waste. To potential Health- bzw. To avoid environmental damage, the product must be disposed of through a sustainable and environmentally sustainable recycling process. Further information for the correct disposal of this product can be obtained from your product supplier or the relevant authority for the mulch care in your region.



All POLAR products undergo rigorous tests to verify compliance with standards and specifications of international and national authorities and independent organizations.



POLAR products must be identified by the following symbol:

All Rights Reserved. This Offer shall be made without the prior written consent of POLAR neither in whole nor in part in any form or by any means - either electronically, mechanically, by

Photocopying, recording or other processing - reproducing or transferring.

Every effort will be made to ensure that all entries are correct at the time of printing.

POLAR reserves the right, however, to change specifications without notice.

Safety Instructions

Read this manual carefully. Proper maintenance and use of this equipment will allow you to get the maximum performance from this POLAR product.

- Position on a flat, stable surface.
- Installation and any repairs must be carried out by a qualified agent/technician. Do not remove components or access panels from the appliance.
- Comply with the following local and national regulations:
 - Rules relating to injuries at work
 - BS EN guidelines
 - Fire precautions
 - IEE regulations on electrical circuits
 - Installation standards
- DO NOT use jet or pressure hydro cleaners to clean the appliance.
- DO NOT operate the appliance outdoors.
- DO NOT use this appliance for the storage of medical supplies.
- DO NOT climb or regress on the base, the drawers or the slides.
- DO NOT allow any oil or grease to come into contact with the plastic components or the sports gasket. Clean up immediately in case of contact.
- Bottles containing a high percentage of alcohol should be sealed and positioned vertically in the refrigerator.
- Always transport, store and use the appliance in an upright position and move it by holding it by the base.
- Before proceeding with cleaning, always turn off and unplug the power to the unit.
- Keep packaging out of reach of children. Dispose of packaging in accordance with local regulations.
- If damaged, the power cord must be replaced by a POLAR agent or a qualified technician to avoid possible hazards.

- The appliance is not intended for use by persons (including children) with reduced physical, sensory or mental abilities, or lacking the necessary experience and knowledge of the appliance, who have not received supervision or instruction regarding the use of the appliance by the person responsible for safety.
- POLAR recommends that you subject this appliance to periodic testing (at least once a year) under the care of a competent person. The tests shall include, among others: visual inspection, check of polarity, continuity of earth conductors, continuity of insulation and tests of operation.

Caution: Fire hazard

- Do not store explosive substances, such as spray balloons with flammable propellants in this appliance.



Warning: Check that no air intake is obstructed. The unit must not be installed in environments with inadequate ventilation.

- **Warning:** do not attempt to speed up the defrosting process by using mechanical devices or other means other than those recommended by the manufacturer.
- **Warning:** do not damage the cooling circuit.
- **Warning:** do not use electrical devices inside the spaces of the appliance intended to contain food.

Package contents

The following components are included:

- POLAR Refrigerator
- Spacers (2 pcs.)
- Instruction Manual

POLAR guarantees impeccable quality and service and ensures that at the time of packaging all supplied components are fully functional and free from defects. If damage resulting from the transport of the product is detected, immediately contact your local POLAR dealer.

Installation

Note: Not suitable for use on board vans or trailers, vehicles used for transporting food or similar vehicles.

Note: If the equipment has not been stored or moved to an upright position, leave it in the upright position for approximately 12 hours before operating it. If in doubt, observe this precaution anyway.

1. Extract the appliance from the packaging. Thoroughly remove all films and all plastic protective coatings from all surfaces.
2. To ensure optimal performance and long service life, leave a minimum distance of 2.5 cm between the unit and walls or other objects, and a minimum distance of 20 cm on the top. **NEVER POSITION THE EQUIPMENT NEAR HEAT SOURCES.**


To prevent the appliance from being accidentally pushed against the wall and ensure proper ventilation, 2 spacers are provided to mount on the back.

3. Engage the brakes on the rollers to hold the appliance in position.

Note: Before using the appliance for the first time, clean the shelf and interior with soap and water, then wipe carefully.

Operation

Control Panel

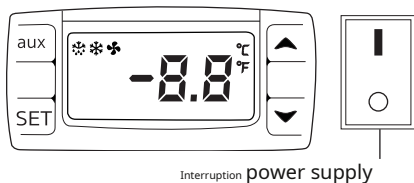

Accession

1. More behind the sports/cases Setti dell'apparecchio.
2. Port are the wing switch On and installation in position [I]. the display comes visual from temperature function corrente inside the app to ecchio.

Impostation of the t and per of exercise izio

1. No ere button pressed 3 and SEVEN (Settings) for seconds.
2. Pre Mere buttons On to display Here you amperage required.
3. Press the button SEVEN (Setting) to adjust the temperature.

Manual defrosting

Press and hold the defrost button "aux" for 2 seconds to initiate a manual defrost. The defrost light comes on.


The defrost cycle will end automatically.

Cleaning, care and maintenance

- **Turn off the appliance and unplug it before cleaning.**
- **Defrost the appliance at least once every 3 months, more often if necessary.**
- Clean the inside of the appliance frequently.
- Do not use abrasive cleaners, as they can leave harmful residues.
- Clean the door seal with warm soapy water.
- Always dry the appliance after cleaning.
- Do not allow water used for cleaning to pass through the drain hole in the evaporation container.
- Pay careful attention while cleaning the back of the appliance. Sharp edges can cause cuts.

Capacitor Cleaning

- The condenser is part of the refrigeration system. Quarterly cleaning is recommended.
- Always unplug the appliance from the power supply to perform routine maintenance.
- Not cleaning the capacitor results in increased energy consumption, a reduction in performance and useful life of the Polar unit and can therefore invalidate the g orange.
- Questi modelli pre s and side a removable filter chand can be pu her with a vacuum cleaner.

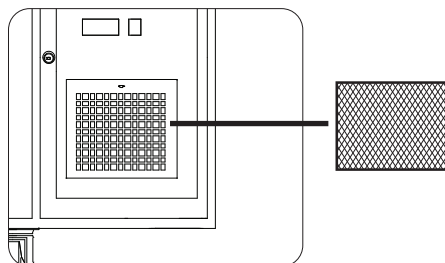

Tips for proper cooling:

- Frequent and prolonged opening of doors causes formation of condensation and ice.
- Also, if the appliance is operated outside the recommended temperature range or if it is located near a heat source, an increase in the amount of ice and internal and external condensation will occur. In case of external condensation, wipe the surface with a cloth.
- Excess icing results in longer operating times resulting in increased energy consumption and component deterioration.
- If the gasket or seal is damaged or deformed, the energy consumption will increase. To restore proper operation, replace the gasket.
- Do not obstruct fans and do not exceed maximum load lines, as this would compromise air distribution and increase energy consumption.

Troubleshooting

If necessary, contact a qualified technician for any repairs.

Issue	Probable cause	Action
The appliance does not works	The appliance is not powered on	Check that the appliance is properly plugged in and turned on
	The outlet or cord is damaged	Replace the plug or cord
	Problem with the power supply	Check the power supply
The appliance is turns on, but the temperature at too high/low	Too much ice in the evaporator	Unplug the appliance
	The dust blocks the capacitor	Clean the capacitor
	The sports fields were not closed properly	Check that the vents have been properly closed and that the gaskets are not damaged
	The appliance is located near a heat source or the air flow to the condenser is interrupted	Move the refrigerator to a more suitable location
	The room temperature is too high	Increase ventilation or move the appliance to a cooler location
	Unsuitable foods have been stored in the appliance	Remove any foods that are too hot or obstructed from the fan
	The appliance is overloaded	Reduce the amount of food stored in the appliance
The appliance loses water	The appliance is not properly in plane	Adjust the screw feet to level the fixture (if applicable).
	The drain outlet is blocked	Release the drain outlet
	The movement of water towards the drain is obstructed	Release the bottom side of the appliance (if applicable)
	The anti-drip tray overflows	Empty the anti-drip tray (if applicable)
The device is very noisy	Loose nut/screw	Check and tighten nuts and screws
	The appliance has not been installed in a flat or stable position	The appliance is too close to a wall or other objects

Electrical Wiring

The plug must be connected to an appropriate power outlet.

The wiring of POLAR devices is described below:

- Wire under tension (brown color) at terminal L
- Wire from the neutral (blue color) to the N terminal
- Ground wire (green/yellow colour) to terminal E

This appliance must be grounded.



If in doubt, consult a qualified electrician.

Points of interruption of electrical supply shall remain free of obstacles. In case of emergency they must be easily reachable, whenever it is necessary to interrupt the power supply.

Disposal

EU regulations require that the disposal of refrigeration products be carried out by companies specializing in the removal or recycling of all gases and metal and plastic components.

For information on the disposal of this appliance, contact the local authority in charge. Local authorities are not required to dispose of commercial refrigeration equipment but can provide information on disposal methods.

Alternatively, call the green number of POLAR for information about companies that deal with disposal in the EU.

Compliance

The RAEE logo on this product or on the documentation indicates that the product cannot be disposed of as normal household waste. To avoid possible harm to health and/or the environment, the product must be disposed of in an approved and environmentally safe procedure. For more information on how to properly dispose of this product, contact the product supplier or local waste disposal agency.



POLAR components are subjected to rigorous testing to verify compliance with the conditions and specifications of legislation provided by international, independent and local authorities.

POLAR products are authorized to display the following symbol:



All rights reserved. Reproduction or transmission in any form, electronic, mechanical, by photocopying or other reproduction system, of any part of these instructions without the prior written authorization of POLAR is prohibited.

The information contained is correct and accurate at the time of printing, however POLAR reserves the right to amend specifications without notice.

Safety Tips

Take a few minutes to read this manual. Proper maintenance and operation of this machine will provide the best possible performance of your POLAR product.

- Place it on a flat, stable surface.
- A qualified service agent / technician should carry out the installation and any repairs if required. Do not remove any component or service panel from this product.
- Refer to the relevant Local and National Standards for the following:
 - Occupational Safety and Hygiene Legislation
 - BS EN Codes of Practice
 - Fire Precautions
 - IEE Wiring Regulations
 - Building Regulations
- DO NOT use jet/pressure washers to clean the appliance.
- DO NOT use the appliance outdoors.
- DO NOT use the appliance to store medical supplies.
- DO NOT climb or lean on the base, drawers or doors.
- DO NOT allow oil or grease to come into contact with the plastic components or the door seal. Clean it immediately if it happens.
- Bottles with a high percentage of alcohol should be sealed and placed vertically in the refrigerator.
- Always transport, store, and handle the appliance in an upright position and move it around the appliance base.
- Always turn off and disconnect the unit power supply before cleaning.
- Keep packaging out of reach of children. Dispose of packaging in accordance with local authority regulations.
- If the electrical cord is damaged, it must be replaced by a POLAR agent or a recommended qualified technician to avoid any risk.

- This appliance should not be used by persons (including children) whose physical, sensory, or mental capacities are reduced or who lack experience and knowledge unless they do so under supervision or following instructions regarding the use of the appliance through a person responsible for its safety.
- POLAR recommends that this appliance be periodically tested (at least annually) by a competent person. Tests shall include, among others: Visual inspection, polarity test, grounding, insulation continuity and operating test.

Caution: Risk of fire

- Do not store explosive substances, such as aerosol cans with a flammable propellant, in this appliance.



Warning: Keep all ventilation outlets clear of obstructions. Make sure the unit has adequate ventilation.

- **Warning:** Do not use mechanical devices or other means to speed up the thawing process other than those recommended by the manufacturer.
- **Warning:** Do not damage the coolant circuit.
- **Warning:** Do not use electrical appliances inside the food storage compartments of the appliance.

Set Contents

These include:

- Nevera POLAR
- 2 separators
- Instruction manual

POLAR prides itself on its quality and service and ensures that at the time of unpacking, the content was supplied with full functionality and without any defects.

If you find any damage resulting from transportation, contact your POLAR dealer immediately.

Installation

Note: Should not be used in vans or trucks, food trucks or similar vehicles.

Note: If the appliance has not been stored or transported upright, leave it in the upright position for approximately 12 hours before operation. If in any doubt, leave the appliance upright.

1. Remove the appliance from the packaging. Be sure to remove all protective plastics and coatings from all surfaces.
2. To optimize performance and service life, be sure to maintain a clearance of at least 2.5 cm between the unit and walls and other objects, with a clearance of at least 20 cm at the top.
NEVER PLACE IT NEAR A HEAT SOURCE.


At the back are included 2 spaces for the mount to prevent it from being pushed against the wall accidentally and thus ensure good ventilation.

3. Put the brakes on the wheels to keep the appliance from moving.

Note: Before using the appliance for the first time, clean the shelves and interior with soapy water and dry thoroughly.

Operation

Control Panel

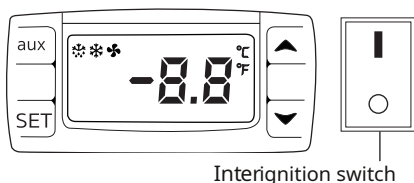

Interignition switch

Enzen dido

1. Closer the doors/drawers of the device.
2. Encienda the current encendido (I). It is displayed from the temperature button within the appliance.

Adjust and of temperature time of function development

1. This hold the button for 3 seconds (Adjustment).
2. Pulse and the buttons On To see the required temperature.
3. Press the button **SEVEN** (Adjustment) to keep the temperature.

Manual Defrost

Hold down the defrost button “aux” for 2 seconds to initiate manual defrost. The defrost light will come on.


The defrost cycle will end automatically.

Cleaning, Care and Maintenance

- **Turn off and unplug from the power source before cleaning.**
- **Thaw the appliance at least once every 3 months, or as often as necessary.**
- Clean the inside of the appliance whenever you can.
- Do not use abrasive cleaning agents. They can leave harmful residues.
- Clean the door seal with warm soapy water.
- Always dry the product after cleaning.
- Do not allow water used during cleaning to flow through the drain hole to the evaporation container.
- Pay attention when cleaning the back of the appliance. Sharp edges can cause cuts.

Condenser Cleaning

- The condenser is part of the cooling system. Cleaning is recommended every three months.
- Always disconnect the power supply before performing routine maintenance tasks.
- Not cleaning the condenser will increase the energy consumption, will reduce performance and the service life of its Polar unit and, therefore, in will validate the guarantee.
- And models dispo of a removable filter can be cleaned with a vacuum cleaner.

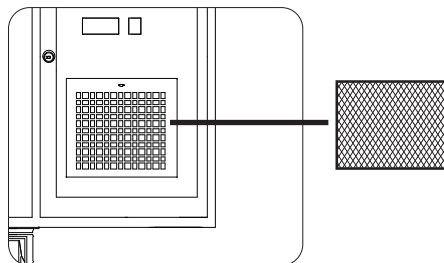

Cooling suggestions:

- Opening the doors frequently and prolonged will cause the occurrence of condensation and ice.
- Use outside the recommended temperature range and placement near a heat source will increase the amount of ice and internal/external condensation. In case of external condensation, wipe the surface with a cloth.
- Excess ice will cause longer operating times which will increase energy consumption and component deterioration.
- If the gasket and seal have been damaged or deformed, the energy consumption will increase. To restore effectiveness, replace the gasket.
- Do not obstruct fans or exceed maximum load levels. Doing so would affect air distribution and increase energy use.

Troubleshooting

A qualified technician should perform the repairs if necessary.

Fallo	Probable cause	Share
The device does not works	The device is not connected	Check that the appliance is properly plugged in and connected
	The plug and cord are damaged	Replace the plug or cord
	Mains power supply failure	Check the power grid
The device se turns on but the temperature is too high/ steel	Too much ice in the evaporator	Unfreeze the appliance
	The capacitor is blocked with dust	Clean the condenser
	The doors are not closed properly	Check if the doors are closed and if the seals are damaged
	The appliance is near a heat source or the condenser airflow is being interrupted	Move the refrigerator to a more suitable position
	The room temperature is too high	Increase the ventilation or move the appliance to a cooler location
	There is unsuitable food in the appliance	Remove excess hot food or blockages in the fan
There are water leaks in the appliance	The appliance is overloaded	Reduce the amount of food stored in the appliance
	The appliance is not properly leveled	Adjust the threaded legs to level the appliance (to be applicable)
	The download outlet is blocked	Remove obstructions from the discharge outlet
	The movement of water to the drain is obstructed	Clear the appliance floor (if applicable)
The apparatus emit noises unusually high	The drip tray is overflowing	Empty drip tray (if applicable)
	Loosen the nut/screw	Check and tighten all nuts and bolts
	The appliance has not been installed in a level or stable position	Check the installation position and change if necessary

Electrical Wiring

The plug must be connected to a suitable electrical outlet.

POLAR appliances has the following cables:

- Charged wire (brown) to the terminal marked as L
- Neutral wire (blue) to the terminal marked as N
- Ground wire (green / yellow) to the terminal marked as E

This appliance must be connected to a grounded outlet.



If in any doubt, consult a qualified electrician.

Electrical isolation points shall be kept free from any obstructions. Should an emergency disconnect be required, they must be available immediately.

Waste

EU regulations require refrigeration products to be disposed of by specialized companies that extract or recycle all gases, metallic and plastic components.

Check with your local waste collection authority when disposing of your appliance. Local authorities are not required to dispose of commercial refrigeration equipment but can offer advice on how to properly dispose of equipment locally.

Another option is to call POLAR's helpline to request information about EU national waste companies.

Compliance

The WEEE logo on this product or its documentation indicates that it should not be disposed of as a household waste. To help prevent potential harm to human health and/or the environment, the product should be disposed of in an approved and environmentally safe recycling process. For more information on how to properly dispose of this product, contact the supplier of the same or the local authority responsible for waste disposal in your area.



POLAR parts have undergone stringent product testing to meet regulatory specifications and standards set by international, independent and federal authorities.



POLAR products have been authorized to carry the following symbol:

All rights reserved. Reproduction or transmission in any form or by any electronic, mechanical, photocopying, recording or other means, of any part of these instructions without the prior and written authorization of POLAR.

Every effort has been made to ensure that all data are correct at the time of publication; are however, POLAR reserves the right to change the specifications without prior notice.

Information requirements for professional refrigerated storage cabinets

Note: Due to our continuous improvement process, the product specifications are subject to change without notice.

BY	Model(s): [information identifying the model(s) to which the information relates]	UA100
FR	Model(s): [identifying information of the model(s) concerned]	
OF	Model(s): [Assumptions for determining the model(s) on which the information relates]	
NL	Model(s): [information to determine the model(s) to which the information relates]	
IS	Model or models: [identifying data of the model or models to which the information relates]	
IT	Templates: [information to identify the templates to which the information relates]	

BY	Intended use	Storage		Category - Vertical/counter	Counter
FR	Intended use	Storage		Category - vertical refrigerator cabinet/ low refrigerated cabinet	low furniture refrigerated
OF	Consumption Purpose	Barrel		Category - Vertical/Tableware	Tuesday
NL	Intended Applications	Bewaring		Category - vertical/buffet	buffet
IS	Intended use	Storage		Category - Vertical/pointer	pointer
IT	Expected Employment	Storage		Category - Vertical/horizontal	horizontal

BY	Operating temperature(s) - chilled/frozen/multi-use	Chilled: - 2°C ~ 8°C
FR	Operating temperature(s) - cooling/freezing/multi-purpose	
OF	Operating Temperature(s) - Cooling/Defrosting/Operating Temperature	
NL	Operating temperature(s) - cooling/freezing/multiple use	
IS	Operating temperature or temperatures - Cooling/freezing/multipurpose	
IT	Exercise Temperatures - Refrigerated/Frozen/Multipurpose Foods	

BY	(where applicable) Heavy-duty/ N/A	N/A
FR	(the failing case) Intensive use/limited use	
OF	(as applicable) Up/Down	
NL	(where applicable) For heavy use/for light use	
IS	(when proceeding) For intensive use/for light use	
IT	(or applicable) High-performance/low-performance	

BY	Refrigerant fluid(s): [information to identify the refrigerant fluid(s), including GWP]	R600a/ GWP 3
FR	Refrigerant fluid(s): [identifying information of the refrigerant fluid(s), including PRP]	
OF	Refrigerant-fluid type(s) [Refers to the exact designation of fluid types, namely greenhouse potential]	
NL	Coolant(s): [information to determine the coolant(s), including GWP]	
IS	Cooling fluid or fluids: [identifying data of the cooling fluid or fluids, including its PCA]	
IT	Coolants:[information to identify coolants, including GWPs]	

V / Hz	H x W x D	Kg
220-240V~ 50Hz	860 x 1360 x 700mm	118kg

Note: For optimal product performance and efficiency, please ensure to mind the net usable capacity (load limit) when filling. Note: For optimal performance and efficiency of the product, consider the net usable capacity (load limit) when filling.

Note: for optimum performance and efficiency of the product, be sure to take into account the net usable capacity (load limit) when filling.

Hint: To ensure optimal operation and efficiency of the equipment, please consider the net payload capacity (load limit) when filling.

Note: To obtain optimal performance and efficiency of the product, keep in mind the net useful capacity (load limit) during refueling. Note: For optimum product performance and efficiency, be sure to consider the net usable capacity (charge limit) when filling it.

		UA100				
BY	Annual Energy Consumption AEC (kWh)	631				
FR	Annual energy consumption					
OF	Annual Energy Consumption					
NL	Annual energy consumption					
IS	Annual energy consumption					
IT	Annual energy consumption					
BY	Energy Efficiency Index EEI	30.7				
FR	Energy Efficiency Index					
OF	Energy Efficiency Index					
NL	Energy Efficiency Index					
IS	Energy Efficiency Index					
IT	Energy efficiency index					
BY	Net volume Vn liter (where applicable)	105L				
FR	Useful Volumes					
OF	Net Environmental Content					
NL	Net volume					
IS	Net volume					
IT	Net volume					
BY	Chilled volume Vn Ref liter	105L				
FR	Volume for cooling					
OF	Refrigerator-Room Maintenance					
NL	Volume for cooling					
IS	Refrigerated volume					
IT	Cooling volume					
BY	Frozen volume Vn Frz liter	N/A				
FR	Volume for freezing					
OF	Free-Space Content					
NL	Volume for freezing					
IS	Frozen volume					
IT	Frozen volume					
BY	Refrigerant load x.xx kg	0.095kg				
FR	Refrigerant fluid charge					
OF	Cold medium refill					
NL	Coolant Fill					
IS	Refrigerant Charge					
IT	Refrigerant charge					
BY	Power / Current	300W/ 1.8A				
FR	Power / Current					
OF	Conduction / Voltage					
NL	Power / Current					
IS	Power / Power					
IT	Power / Power					

Information requirements for professional refrigerated storage cabinets

Note: Due to our continuous improvement process, the product specifications are subject to change without notice.

BY	Model(s): [information identifying the model(s) to which the information relates]	UA101
FR	Model(s): [identifying information of the model(s) concerned]	
OF	Model(s): [Assumptions for determining the model(s) on which the information relates]	
NL	Model(s): [information to determine the model(s) to which the information relates]	
IS	Model or models: [identifying data of the model or models to which the information relates]	
IT	Templates: [information to identify the templates to which the information relates]	

BY	Intended use	Storage		Category - Vertical/counter	Counter
FR	Intended use	Storage		Category - vertical refrigerator cabinet/ low refrigerated cabinet	low furniture refrigerated
OF	Consumption Purpose	Barrel		Category - Vertical/Tableware	Tuesday
NL	Intended Applications	Bewaring		Category - vertical/buffet	buffet
IS	Intended use	Storage		Category - Vertical/pointer	pointer
IT	Expected Employment	Storage		Category - Vertical/horizontal	horizontal

BY	Operating temperature(s) - chilled/frozen/multi-use	Chilled: - 2°C ~ 8°C
FR	Operating temperature(s) - cooling/freezing/multi-purpose	
OF	Operating Temperature(s) - Cooling/Defrosting/Operating Temperature	
NL	Operating temperature(s) - cooling/freezing/multiple use	
IS	Operating temperature or temperatures - Cooling/freezing/multipurpose	
IT	Exercise Temperatures - Refrigerated/Frozen/Multipurpose Foods	

BY	(where applicable) Heavy-duty/ N/A	N/A
FR	(the failing case) Intensive use/limited use	
OF	(as applicable) Up/Down	
NL	(where applicable) For heavy use/for light use	
IS	(when proceeding) For intensive use/for light use	
IT	(or applicable) High-performance/low-performance	

BY	Refrigerant fluid(s): [information to identify the refrigerant fluid(s), including GWP]	R600a/ GWP 3
FR	Refrigerant fluid(s): [identifying information of the refrigerant fluid(s), including PRP]	
OF	Refrigerant-fluid type(s) [Refers to the exact designation of fluid types, namely greenhouse potential]	
NL	Coolant(s): [information to determine the coolant(s), including GWP]	
IS	Cooling fluid or fluids: [identifying data of the cooling fluid or fluids, including its PCA]	
IT	Coolants:[information to identify coolants, including GWPs]	

V / Hz	H x W x D	Kg
220-240V~ 50Hz	860 x 1795 x 700mm	164kg

Note: For optimal product performance and efficiency, please ensure to mind the net usable capacity (load limit) when filling. Note: For optimal performance and efficiency of the product, consider the net usable capacity (load limit) when filling.

Note: for optimum performance and efficiency of the product, be sure to take into account the net usable capacity (load limit) when filling.

Hint: To ensure optimal operation and efficiency of the equipment, please consider the net payload capacity (load limit) when filling.

Note: To obtain optimal performance and efficiency of the product, keep in mind the net useful capacity (load limit) during refueling. Note: For optimum product performance and efficiency, be sure to consider the net usable capacity (charge limit) when filling it.

		UA101				
BY	Annual Energy Consumption AEC (kWh)	734				
FR	Annual energy consumption					
OF	Annual Energy Consumption					
NL	Annual energy consumption					
IS	Annual energy consumption					
IT	Annual energy consumption					
BY	Energy Efficiency Index EEI	33.4				
FR	Energy Efficiency Index					
OF	Energy Efficiency Index					
NL	Energy Efficiency Index					
IS	Energy Efficiency Index					
IT	Energy efficiency index					
BY	Net volume Vn liter (where applicable)	158L				
FR	Useful Volumes					
OF	Net Environmental Content					
NL	Net volume					
IS	Net volume					
IT	Net volume					
BY	Chilled volume Vn Ref liter	158L				
FR	Volume for cooling					
OF	Refrigerator-Room Maintenance					
NL	Volume for cooling					
IS	Refrigerated volume					
IT	Cooling volume					
BY	Frozen volume Vn Frz liter	N/A				
FR	Volume for freezing					
OF	Free-Space Content					
NL	Volume for freezing					
IS	Frozen volume					
IT	Frozen volume					
BY	Refrigerant load x.xx kg	0.095kg				
FR	Refrigerant fluid charge					
OF	Cold medium refill					
NL	Coolant Fill					
IS	Refrigerant Charge					
IT	Refrigerant charge					
BY	Power / Current	300W/ 1.8A				
FR	Power / Current					
OF	Conduction / Voltage					
NL	Power / Current					
IS	Power / Power					
IT	Power / Power					

Information requirements for professional refrigerated storage cabinets

Note: Due to our continuous improvement process, the product specifications are subject to change without notice.

BY	Model(s): [information identifying the model(s) to which the information relates]	UA102
FR	Model(s): [identifying information of the model(s) concerned]	
OF	Model(s): [Assumptions for determining the model(s) on which the information relates]	
NL	Model(s): [information to determine the model(s) to which the information relates]	
IS	Model or models: [identifying data of the model or models to which the information relates]	
IT	Templates: [information to identify the templates to which the information relates]	

BY	Intended use	Storage		Category - Vertical/counter	Counter
FR	Intended use	Storage		Category - vertical refrigerator cabinet/ low refrigerated cabinet	low furniture refrigerated
OF	Consumption Purpose	Barrel		Category - Vertical/Tableware	Tuesday
NL	Intended Applications	Bewaring		Category - vertical/buffet	buffet
IS	Intended use	Storage		Category - Vertical/pointer	pointer
IT	Expected Employment	Storage		Category - Vertical/horizontal	horizontal

BY	Operating temperature(s) - chilled/frozen/multi-use	Chilled: - 2°C ~ 8°C
FR	Operating temperature(s) - cooling/freezing/multi-purpose	
OF	Operating Temperature(s) - Cooling/Defrosting/Operating Temperature	
NL	Operating temperature(s) - cooling/freezing/multiple use	
IS	Operating temperature or temperatures - Cooling/freezing/multipurpose	
IT	Exercise Temperatures - Refrigerated/Frozen/Multipurpose Foods	

BY	(where applicable) Heavy-duty/ N/A	N/A
FR	(the failing case) Intensive use/limited use	
OF	(as applicable) Up/Down	
NL	(where applicable) For heavy use/for light use	
IS	(when proceeding) For intensive use/for light use	
IT	(or applicable) High-performance/low-performance	

BY	Refrigerant fluid(s): [information to identify the refrigerant fluid(s), including GWP]	R600a/ GWP 3
FR	Refrigerant fluid(s): [identifying information of the refrigerant fluid(s), including PRP]	
OF	Refrigerant-fluid type(s) [Refers to the exact designation of fluid types, namely greenhouse potential]	
NL	Coolant(s): [information to determine the coolant(s), including GWP]	
IS	Cooling fluid or fluids: [identifying data of the cooling fluid or fluids, including its PCA]	
IT	Coolants:[information to identify coolants, including GWPs]	

V / Hz	H x W x D	Kg
220-240V~ 50Hz	860 x 2230 x 700mm	193kg

Note: For optimal product performance and efficiency, please ensure to mind the net usable capacity (load limit) when filling. Note: For optimal performance and efficiency of the product, consider the net usable capacity (load limit) when filling.

Note: for optimum performance and efficiency of the product, be sure to take into account the net usable capacity (load limit) when filling.

Hint: To ensure optimal operation and efficiency of the equipment, please consider the net payload capacity (load limit) when filling.

Note: To obtain optimal performance and efficiency of the product, keep in mind the net useful capacity (load limit) during refueling. Note: For optimum product performance and efficiency, be sure to consider the net usable capacity (charge limit) when filling it.

		UA102				
BY	Annual Energy Consumption AEC (kWh)	770				
FR	Annual energy consumption					
OF	Annual Energy Consumption					
NL	Annual energy consumption					
IS	Annual energy consumption					
IT	Annual energy consumption					
BY	Energy Efficiency Index EEI	33.1				
FR	Energy Efficiency Index					
OF	Energy Efficiency Index					
NL	Energy Efficiency Index					
IS	Energy Efficiency Index					
IT	Energy efficiency index					
BY	Net volume Vn liter (where applicable)	211L				
FR	Useful Volumes					
OF	Net Environmental Content					
NL	Net volume					
IS	Net volume					
IT	Net volume					
BY	Chilled volume Vn Ref liter	211L				
FR	Volume for cooling					
OF	Refrigerator-Room Maintenance					
NL	Volume for cooling					
IS	Refrigerated volume					
IT	Cooling volume					
BY	Frozen volume Vn Frz liter	N/A				
FR	Volume for freezing					
OF	Free-Space Content					
NL	Volume for freezing					
IS	Frozen volume					
IT	Frozen volume					
BY	Refrigerant load x.xx kg	0.095kg				
FR	Refrigerant fluid charge					
OF	Cold medium refill					
NL	Coolant Fill					
IS	Refrigerant Charge					
IT	Refrigerant charge					
BY	Power / Current	300W/ 1.8A				
FR	Power / Current					
OF	Conduction / Voltage					
NL	Power / Current					
IS	Power / Power					
IT	Power / Power					

Information requirements for professional refrigerated storage cabinets

Note: Due to our continuous improvement process, the product specifications are subject to change without notice.

BY	Model(s): [information identifying the model(s) to which the information relates]	UA108
FR	Model(s): [identifying information of the model(s) concerned]	
OF	Model(s): [Assumptions for determining the model(s) on which the information relates]	
NL	Model(s): [information to determine the model(s) to which the information relates]	
IS	Model or models: [identifying data of the model or models to which the information relates]	
IT	Templates: [information to identify the templates to which the information relates]	

BY	Intended use	Storage		Category - Vertical/counter	Counter
FR	Intended use	Storage		Category - vertical refrigerator cabinet/ low refrigerated cabinet	low furniture refrigerated
OF	Consumption Purpose	Barrel		Category - Vertical/Tableware	Tuesday
NL	Intended Applications	Bewaring		Category - vertical/buffet	buffet
IS	Intended use	Storage		Category - Vertical/pointer	pointer
IT	Expected Employment	Storage		Category - Vertical/horizontal	horizontal

BY	Operating temperature(s) - chilled/frozen/multi-use	Chilled: - 2°C ~ 8°C
FR	Operating temperature(s) - cooling/freezing/multi-purpose	
OF	Operating Temperature(s) - Cooling/Defrosting/Operating Temperature	
NL	Operating temperature(s) - cooling/freezing/multiple use	
IS	Operating temperature or temperatures - Cooling/freezing/multipurpose	
IT	Exercise Temperatures - Refrigerated/Frozen/Multipurpose Foods	

BY	(where applicable) Heavy-duty/ N/A	N/A
FR	(the failing case) Intensive use/limited use	
OF	(as applicable) Up/Down	
NL	(where applicable) For heavy use/for light use	
IS	(when proceeding) For intensive use/for light use	
IT	(or applicable) High-performance/low-performance	

BY	Refrigerant fluid(s): [information to identify the refrigerant fluid(s), including GWP]	R600a/ GWP 3
FR	Refrigerant fluid(s): [identifying information of the refrigerant fluid(s), including PRP]	
OF	Refrigerant-fluid type(s) [Refers to the exact designation of fluid types, namely greenhouse potential]	
NL	Coolant(s): [information to determine the coolant(s), including GWP]	
IS	Cooling fluid or fluids: [identifying data of the cooling fluid or fluids, including its PCA]	
IT	Coolants:[information to identify coolants, including GWPs]	

V / Hz	H x W x D	Kg
220-240V~ 50Hz	860 x 1360 x 700mm	108kg

Note: For optimal product performance and efficiency, please ensure to mind the net usable capacity (load limit) when filling. Note: For optimal performance and efficiency of the product, consider the net usable capacity (load limit) when filling.

Note: for optimum performance and efficiency of the product, be sure to take into account the net usable capacity (load limit) when filling.

Hint: To ensure optimal operation and efficiency of the equipment, please consider the net payload capacity (load limit) when filling.

Note: To obtain optimal performance and efficiency of the product, keep in mind the net useful capacity (load limit) during refueling. Note: For optimum product performance and efficiency, be sure to consider the net usable capacity (charge limit) when filling it.

		UA108				
BY	Annual Energy Consumption AEC (kWh)	628				
FR	Annual energy consumption					
OF	Annual Energy Consumption					
NL	Annual energy consumption					
IS	Annual energy consumption					
IT	Annual energy consumption					
BY	Energy Efficiency Index EEI	29.2				
FR	Energy Efficiency Index					
OF	Energy Efficiency Index					
NL	Energy Efficiency Index					
IS	Energy Efficiency Index					
IT	Energy efficiency index					
BY	Net volume Vn liter (where applicable)	143L				
FR	Useful Volumes					
OF	Net Environmental Content					
NL	Net volume					
IS	Net volume					
IT	Net volume					
BY	Chilled volume Vn Ref liter	143L				
FR	Volume for cooling					
OF	Refrigerator-Room Maintenance					
NL	Volume for cooling					
IS	Refrigerated volume					
IT	Cooling volume					
BY	Frozen volume Vn Frz liter	N/A				
FR	Volume for freezing					
OF	Free-Space Content					
NL	Volume for freezing					
IS	Frozen volume					
IT	Frozen volume					
BY	Refrigerant load x.xx kg	0.095kg				
FR	Refrigerant fluid charge					
OF	Cold medium refill					
NL	Coolant Fill					
IS	Refrigerant Charge					
IT	Refrigerant charge					
BY	Power / Current	300W/ 1.8A				
FR	Power / Current					
OF	Conduction / Voltage					
NL	Power / Current					
IS	Power / Power					
IT	Power / Power					

Information requirements for professional refrigerated storage cabinets

Note: Due to our continuous improvement process, the product specifications are subject to change without notice.

BY	Model(s): [information identifying the model(s) to which the information relates]	UA109
FR	Model(s): [identifying information of the model(s) concerned]	
OF	Model(s): [Assumptions for determining the model(s) on which the information relates]	
NL	Model(s): [information to determine the model(s) to which the information relates]	
IS	Model or models: [identifying data of the model or models to which the information relates]	
IT	Templates: [information to identify the templates to which the information relates]	

BY	Intended use	Storage		Category - Vertical/counter	Counter
FR	Intended use	Storage		Category - vertical refrigerator cabinet/ low refrigerated cabinet	low furniture refrigerated
OF	Consumption Purpose	Barrel		Category - Vertical/Tableware	Tuesday
NL	Intended Applications	Bewaring		Category - vertical/buffet	buffet
IS	Intended use	Storage		Category - Vertical/pointer	pointer
IT	Expected Employment	Storage		Category - Vertical/horizontal	horizontal

BY	Operating temperature(s) - chilled/frozen/multi-use	Chilled: - 2°C ~ 8°C
FR	Operating temperature(s) - cooling/freezing/multi-purpose	
OF	Operating Temperature(s) - Cooling/Defrosting/Operating Temperature	
NL	Operating temperature(s) - cooling/freezing/multiple use	
IS	Operating temperature or temperatures - Cooling/freezing/multipurpose	
IT	Exercise Temperatures - Refrigerated/Frozen/Multipurpose Foods	

BY	(where applicable) Heavy-duty/ N/A	N/A
FR	(the failing case) Intensive use/limited use	
OF	(as applicable) Up/Down	
NL	(where applicable) For heavy use/for light use	
IS	(when proceeding) For intensive use/for light use	
IT	(or applicable) High-performance/low-performance	

BY	Refrigerant fluid(s): [information to identify the refrigerant fluid(s), including GWP]	R600a/ GWP 3
FR	Refrigerant fluid(s): [identifying information of the refrigerant fluid(s), including PRP]	
OF	Refrigerant-fluid type(s) [Refers to the exact designation of fluid types, namely greenhouse potential]	
NL	Coolant(s): [information to determine the coolant(s), including GWP]	
IS	Cooling fluid or fluids: [identifying data of the cooling fluid or fluids, including its PCA]	
IT	Coolants:[information to identify coolants, including GWPs]	

V / Hz	H x W x D	Kg
220-240V~ 50Hz	860 x 1795 x 700mm	144kg

Note: For optimal product performance and efficiency, please ensure to mind the net usable capacity (load limit) when filling. Note: For optimal performance and efficiency of the product, consider the net usable capacity (load limit) when filling.

Note: for optimum performance and efficiency of the product, be sure to take into account the net usable capacity (load limit) when filling.

Hint: To ensure optimal operation and efficiency of the equipment, please consider the net payload capacity (load limit) when filling.

Note: To obtain optimal performance and efficiency of the product, keep in mind the net useful capacity (load limit) during refueling. Note: For optimum product performance and efficiency, be sure to consider the net usable capacity (charge limit) when filling it.

		UA109				
BY	Annual Energy Consumption AEC (kWh)	726				
FR	Annual energy consumption					
OF	Annual Energy Consumption					
NL	Annual energy consumption					
IS	Annual energy consumption					
IT	Annual energy consumption					
BY	Energy Efficiency Index EEI	30.2				
FR	Energy Efficiency Index					
OF	Energy Efficiency Index					
NL	Energy Efficiency Index					
IS	Energy Efficiency Index					
IT	Energy efficiency index					
BY	Net volume Vn liter (where applicable)	242L				
FR	Useful Volumes					
OF	Net Environmental Content					
NL	Net volume					
IS	Net volume					
IT	Net volume					
BY	Chilled volume Vn Ref liter	242L				
FR	Volume for cooling					
OF	Refrigerator-Room Maintenance					
NL	Volume for cooling					
IS	Refrigerated volume					
IT	Cooling volume					
BY	Frozen volume Vn Frz liter	N/A				
FR	Volume for freezing					
OF	Free-Space Content					
NL	Volume for freezing					
IS	Frozen volume					
IT	Frozen volume					
BY	Refrigerant load x.xx kg	0.095kg				
FR	Refrigerant fluid charge					
OF	Cold medium refill					
NL	Coolant Fill					
IS	Refrigerant Charge					
IT	Refrigerant charge					
BY	Power / Current	300W/ 1.8A				
FR	Power / Current					
OF	Conduction / Voltage					
NL	Power / Current					
IS	Power / Power					
IT	Power / Power					

DECLARATION OF CONFORMITY

• Declaration of Conformity • Declaration of Conformity • Declaration of Conformity •
• Statement of conformity

Equipment Type • Equipment type • Equipment type • Device type • Type of equipment • Type of equipment		Pattern • Templates • Template • Template • Template			
1. U-SeriesDoubleDoorSlimlineCounterFridge 2. U-SeriesTripleDoorSlimlineCounterFridge 3. U-SeriesFourDoorSlimlineCounter Fridge 4. U-Series Double Drawer Counter Fridge 5. U-Series 2Door &2Drawer Counter Fridge	6. U-Series Four Drawer Gastronorm Counter Fridge 7. U-Series Six Drawer Gastronorm Counter Fridge 8. U-Series Eight Drawer Gastronorm Counter Fridge 9. U-Series Counter 4 Drawers & 1 Door 10. U-Series Counter 4 Drawers & 2 Doors	1. UA105 (-E & -A) 2. UA106 (-E & -A) 3. UA107 (-E & -A) 4. UA108 (-E & -A) 5. UA109 (-E & -A)	6. UA100 (-E & -A) 7. UA101 (-E & -A) 8. UA102 (-E & -A) 9. UA103 (-E & -A) 10. UA104 (-E & -A)		
Application of Territory Legislation & Council Directive(s) Application of European Directive(s) • Application of Council Directive(s) • Applicable EU Directive(s) • Application of the Directives • Application of council guideline(s)		Machinery Directive 2006/42/EC Supply of Machinery (Safety) Regulations 2008 EN 60335-1:2012 +A11:2014 +A13:2017 +A1:2019 + A14:2019 +A2:2019 +A15:2021 +A16:2023 EN IEC 60335-2-89:2022 +A11:2022 EN 62233:2008 Electro-Magnetic Compatibility (EMC) Directive 2014/30/EU - recast of 2004/108/EC Electromagnetic Compatibility Regulations 2016 (SI 2016/1091) EN IEC 55014-1: 2021 EN IEC 55014-2: 2021 EN IEC 61000-3-2: 2019+A1:2021+A2:2024 EN 61000-3-3: 2013+A1:2019+A2: 2021 Restriction of Hazardous Substances Directive (RoHS) 2015/863 amending Annex II to Directive 2011/65/EU Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (SI 2012/3032)		Electrical Safety IEC 60335-1:2010 +A1:2013 +A2:2016 IEC 60335-2-89:2019 Electromagnetic Compatibility EN IEC 55014-1: 2021 EN IEC 55014-2: 2021 EN IEC 61000-3-2: 2019+A1:2021+A2:2024 EN 61000-3-3: 2013+A1:2019+A2: 2021	
Manufacturer Name • Manufacturer's name • Manufacturer's name • Repairer's name • Manufacturer Name • Manufacturer Name		Polar			

I, the undersigned, hereby declare that the equipment specified above conforms to the above Territory Legislation, Directive(s) and Standard(s).

I, the undersigned, hereby certify that the equipment specified above is approved in accordance with the above Guideline(s) and Standard(s).

I undersigned, confirm the compliance of the equipment mentioned herein with the above Guideline(s) and Standard(s)

I, the undersigned, hereby declare that the above Device conforms to the above Guideline(s) and Standard(s).

The undersigned declares that the above specified equipment complies with the above Directives and Standards.

The undersigned hereby declares that the above specified equipment is in compliance with the above guideline(s) and standard(s).

Date • Date • Date • Date • Date
Date

Signature • Signature •
Signature • Signature
Company • Company

Full Name • Full name • First name •
Full name • Full name • Full name

Position • Functie • Fonction •
Position • Qualifica • Posición

Manufacturer Address • Manufacturer's
address • Manufacturer's address •
Manufacturer's address • Manufacturer's
address

to **12th May 2025**

Signed by:  AB6DB7656FFB441		DocuSigned by:  386FAD00DFF8483	
Ashley Hooper		Brendan Denmeade	
Group Head of Product Quality & Compliance		Commercial Manager/ Supplier Manager	
Fourth Way, Avonmouth, Bristol, BS11 8TB United Kingdom	Unit 9003, Blarney Business Park, Blarney, Co. Cork Ireland	15 Badgally Road, Campbelltown NSW 2560	





UK	0117 3075655	service@technical-sales.co.uk
Eire	021 4946777	Sales@nisbets.ie
NL	040 2628080	service@nisbets.nl
FR	01 60342880	save@nisbets.fr
BE-NL	0800 29129	service@nisbets.be
BE-EN	0800 29229	service@nisbets.be
OF	0800 1860806	service@nisbets.de
IS	901 100133	
AU	1300 225 960	
NZ	0800 222 700	

POLAR



<http://www.polar-refrigerator.com/>



UA100-UA101-UA102-UA108-UA109_ML_A5_v1_2025/05/22