





PHDR01/P - Lincat
Phoenix Dual Fuel
Propane Gas Freestanding Oven Range - 6Zone - W 900 mm - 36 kW
[Gas] - 6 kW [Electric]

The high quality Phoenix dual fuel oven range offers power, durability, and excellent value for money.

- Powerful 6kW burners the pan will heat up quicker, speeding up processes such as boiling and sautéing, achieving a caramelised colour faster
- Fully pressed hob Simpler and quicker to clean
- Twin heavy-duty cast iron supports, built to withstand the rigours of the busiest kitchen
- Low flue, hob top accommodates larger pans
- Powerful 6kW twin fan assisted oven for more even cooking. Large 4 x GN1/1 capacity enabling four different foods to be cooked simultaneously
- 2 shelves and 5 shelf positions maximise oven space
- Castors supplied as standard, not as a chargeable extra

Specifications			
Summary		Power and Performance	
Brand	Lincat	BTU per Hour	122,832
Range	Phoenix	Temperature Range °C	40 - 250
Power Type	Dual Fuel	IP Rating	IPX4
Gas Type	Propane Gas	Temperature Control	Mechanical
Unit Type	Free-standing	Rating per Hob kW	6
Available in UK Only	No	Oven Rating kW	6
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105121398		
Key Specifications		Capacity	
Number of Shelves included	2	Gastronorm Capacity	4 × GN1/1
Number of Shelf Positions	5		
Number of Hobs	6		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	900	Requires Installation	Yes
Unit Width (External) mm	900	Requires Electrical Supply	Yes

Weights and Dimensions		Supply Connections	Supply Connections	
Unit Height (External) mm	900	Requires Installation	Yes	
Unit Width (External) mm	900	Requires Electrical Supply	Yes	
Unit Depth (External) mm	800	UK 3 Pin Plug	No	
Height (Internal) mm	400	Requires Hardwiring	Yes	
Width (Internal) mm	715	Electrical Supply Rating Watts	6000	
Depth (Internal) mm	530	Single Phase Amps	26.1	
Shelf Dimensions Width mm	710	Single Phase Voltage	230	
Shelf Dimensions Depth mm	512	Three Phase Amps	L1=8.7; L2=8.7; L3=8.7	
Net Weight Kg	125	Three Phase Voltage	400	
		Gas Connection BSP	3/4"	
		Gas Consumption at full rate Propane m³ per Hour	2.58	
		Gas Pressure Propane mbar	37	
		Total heat input at full rate Propane kW	36	
		Total heat input at full rate Propane BTU per hour	122,832	





Shipping


Packed Weight Kg145Packed Height cm105Packed Width cm100Packed Depth cm85


Available Accessories

LK12 NULL

OA8902 SPLASHBACK/SHELF - 0G8002

Technical Picture

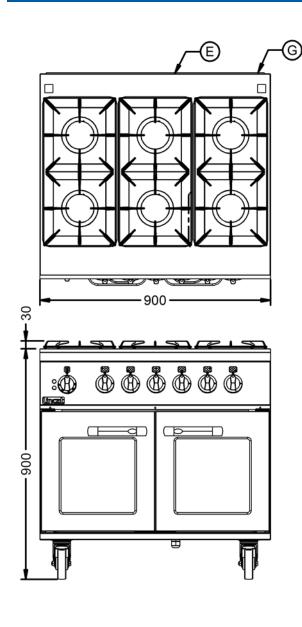









Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm