

# **Speed Queen®**

## **FDE/FDG FRONT CONTROL DRYER**




- Convenient front controls
- Upfront secured lint filter
- 4800W electric heating element
- 20,000 BTU (5,040 kcal) gas heat per hour
- Optional 3 phase electric heat model

# Speed Queen®

## FDE/FDG FRONT CONTROL DRYER

SPECIFICATIONS	FDE	FDG
Width - mm	683	683
Depth - mm	711	711
Height - mm	1027	1027
Capacity - kg	8.2kg	8.2kg
Cylinder Volume - litres (cu.ft.)	198 (7.0)	198 (7.0)
Motor - HP	1/3	1/3
Motor - RPM	1425	1425
BTU Per Hour		20,232
Heating Element	4.8kw or 2.8kw	5.9kw of Gas
Type of Gas (Gas models only)	N/A	Factory-equipped natural/mixed gas** Convertible to LP gas
Gas Utility Connections	N/A	3/8" NPT
Air Outlet Diameter - mm	102	102
Exhaust Airflow* - litres/sec (cfm)	104 (220)	104 (220)
Maximum Exhaust Static Back Pressure - mm (in)	10 mm (4"WC)	10 mm (4"WC)
Electrical Specifications - Circuit Requirements	230/50/1, 4.8kw element on a single phase 32a breaker	230/50/1 • 10a = 13a plug top
Colour	White	White
Net Weight - kg (lb)	68 (150)	70 (155)
Shipping weight - kg (lb)	73 (160)	75 (165)
Agency Approvals	CE	CE

Make up air 1016mm<sup>2</sup> (40in<sup>2</sup>) = hole size of 155mm x 155mm of free air

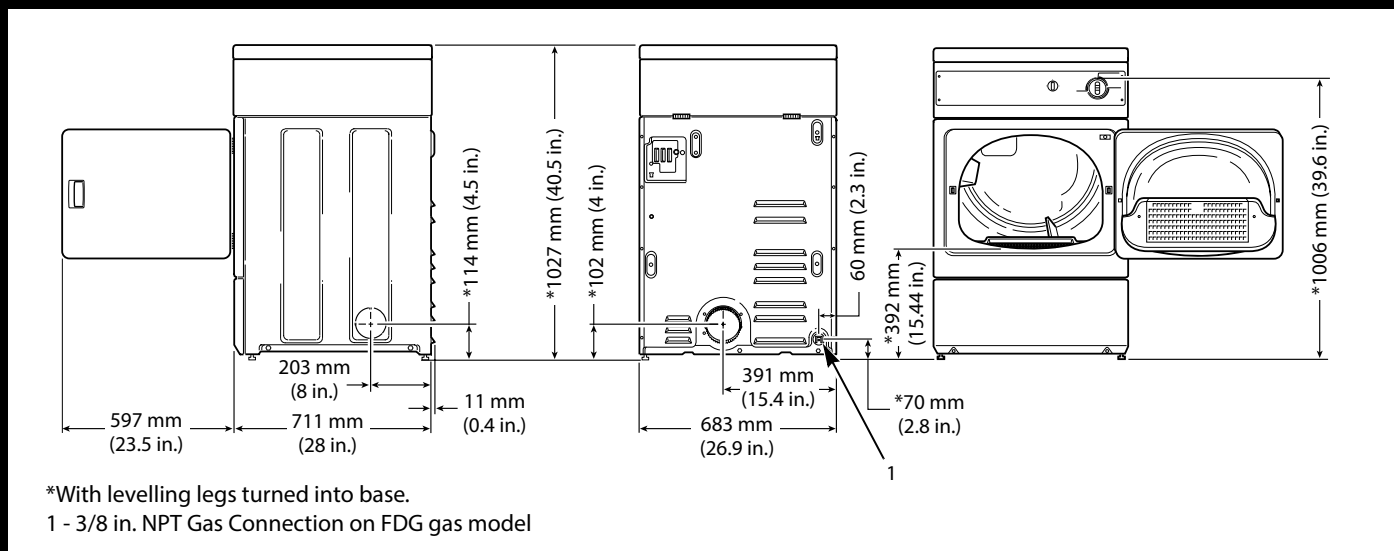

**Armstrong**  
COMMERCIAL LAUNDRY SYSTEMS

**Head Office:** Unit 11, Arnhem Road, Bone Lane, Newbury, Berkshire RG14 5RU

**Sales:** +44 (0)1635 263410

**Parts:** +44 (0)1635 263415

**Service:** +44 (0)1635 263425

**Switchboard:** +44 (0)1635 263400

**Email:** enquiries@armstronglaundry.com

**Web:** www.armstronglaundry.com

**Scottish office**

46 Kelvin Avenue, Hillington Park, Glasgow G52 4LT

**Tel:** +44 (0)141 892 2390

**Email:** scotland@armstronglaundry.com

11.18/150

