


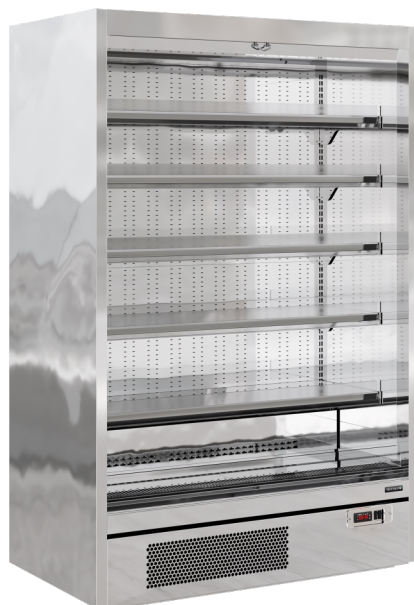

Galaxy+ GP14 SS

Multideck

Product Features

- Fully automatic, fan assisted cooling
- Horizontal LED lighting
- Solid 40 mm endwalls with mirrored interior
- Soft closing nightblind
- 5 Adjustable shelves, max weight 160kg/sq metre
- Shelves can be flat or angled to 7° or 14°
- EPOS Ticket strips & shelf risers
- Suitable for fresh meat
- Can be multiplexed with kit (POA)

Stainless Steel Multideck

The TEFCOLD Galaxy+ range, finished in mirror stainless steel: part of our popular assortment of plug-in multidecks. We've combined an expanded display area and optimised cabinet efficiency. The ultra-low front and slim top canopy provide an extra 100mm of internal height, accommodating up to 5 shelves (plus base) as standard, all while maintaining an overall height of just 2040mm. With a standard depth, the unit fits through most doors for easy installation, yet has deep shelves for maximum stock capacity. Each unit comes with heavy-duty adjustable shelves that can be tilted if needed, as well as EPOS ticket strips and shelf risers as standard. Optional extras include glass endwalls and multiplexing kits.

Measures and Content

Gross / Net Weight	kg	298 / 280
Net Volume	l	629
Gross Volume	l	1443
Gross / Net Volume	l	1443 / 629
Total Display Area	m ²	2.09
Temperature Range	°C	-1 to +5
Climate Class		3

Design and Material

Exterior Finish	Mirror Stainless Steel	
Interior Finish	Mirror Stainless Steel	
Door Number & Type		
No. of Shelves	pcs	5
Shelves Number & Type	5 adjustable	
Shelf Color	Stainless steel	
Shelf Dimensions	1250x400mm	
Max load on Shelves	kg/m ²	160
Feet / Legs	4 adjustable feet	
Castors	4 castors, 2 with brake	
Night Curtain	Yes	
Interior Light	LED	

Cooling and Functions

Type of Controller	Electronic	
Type of Defrost	Automatic	
Refrigerant	R290	
Refrigerant Charge	g	150
Thermometer	Yes	

Power and Consumption

Energy Class	D	
Max Ambient	+25°C, 60% RH	
Energy Consumption	kWh/24h	16.65
Annual Energy Consumption	kWh/year	6077
EEl	%	49.7
Power	16 Amp	
Input Power	W	877
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	55

Dimensions

External Dimension (WxDxH)	mm	1330 x 750 x 2005
Internal Dimension (WxDxH)	mm	1250 x 544 x 1562
Packed Dimension (WxDxH)	mm	1400 x 760 x 2300
40ft Container Load	pcs	24



Adjustable shelves



Digital controller