



## OG8115/OP/N - Lincat Opus 800 Natural Gas Free-standing Single Tank Fryer with Pumped Filtration - 2 Baskets - W 400 mm - 22.0 kW

The Vortech High Efficiency Opus 800 Free Standing Fryer not only fries delicious food, but also saves you both money & energy at the same time.

- ✓ 97% energy efficiency rating verified in independent BSI tests delivers substantially lower running costs and higher output
- ✓ Two stage filtration extends oil life by up to 75% and so reducing oil costs
- ✓ Oil can be filtered during or after service even whilst hot
- ✓ Convenient electronic ignition
- ✓ Externally fired heating gives easy access for cleaning tanks

### Specifications

#### Summary

<b>Brand</b>	Lincat
<b>Range</b>	Opus 800
<b>Power Type</b>	Gas
<b>Gas Type</b>	Natural Gas
<b>Unit Type</b>	Free-standing
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN</b>	5056105103196

#### Power and Performance

<b>BTU per Hour</b>	75,064
<b>Total Power kW</b>	22.0
<b>Temperature Range °C</b>	90-190
<b>IP Rating</b>	IP24
<b>Temperature Control</b>	Electronic

#### Key Specifications

<b>Number of Baskets</b>	2
<b>Number of Tanks</b>	1
<b>Gravity Filtration</b>	No
<b>Pumped Filtration</b>	Yes
<b>Drain Location</b>	Through the body

#### Capacity

<b>Product Output per Hour</b>	40kg chips - 12mm [frozen], 51kg chips - 12mm [chi]
<b>Capacity Litres</b>	16.0

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	1070
<b>Unit Width (External) mm</b>	400
<b>Unit Depth (External) mm</b>	800
<b>Net Weight Kg</b>	99.2

#### Supply Connections

<b>Requires Installation</b>	Yes
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	Yes
<b>Requires Hardwiring</b>	No
<b>Electrical Supply Rating Watts</b>	100
<b>Single Phase Amps</b>	4.9
<b>Single Phase Voltage</b>	230
<b>Gas Connection BSP</b>	1/2"
<b>Gas Consumption at full rate Natural m<sup>3</sup> per Hour</b>	2.1
<b>Gas Pressure Natural mbar</b>	20.0
<b>Total heat input at full rate Natural kW</b>	22.0
<b>Total heat input at full rate Natural BTU per hour</b>	75,064




**Shipping**

<b>Packed Weight Kg</b>	109.12
<b>Packed Height cm</b>	122
<b>Packed Width cm</b>	70
<b>Packed Depth cm</b>	85

**Available Accessories**

<b>FP07</b>	F8 CARBON FILTER PAD
<b>LK02</b>	OPUS 350 LEG KIT
<b>OA8961</b>	SPLASHGUARD VORTECH - OPUS 800

**Technical Picture**

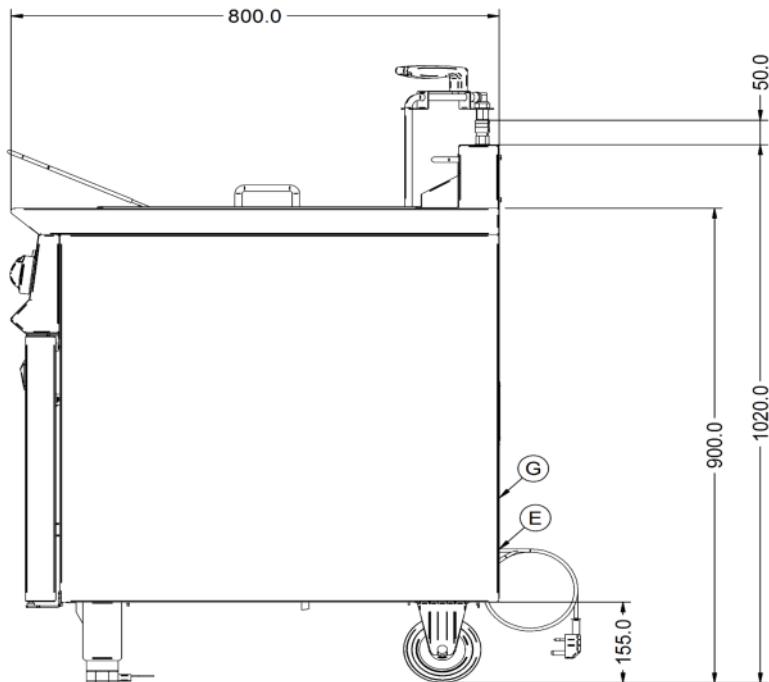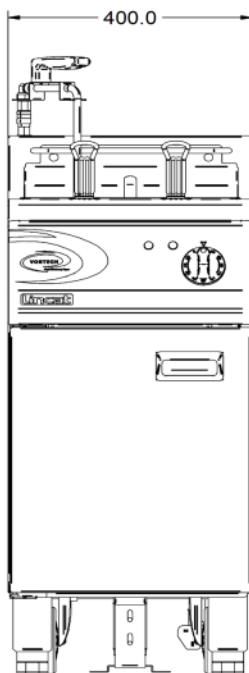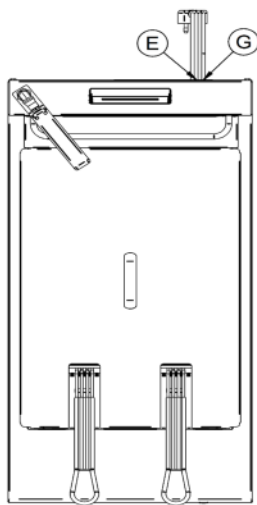



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm